



# ROCKER & TOGGLE LIGHT SWITCH

**WARNING** Never take risks with electrical safety. Always disconnect the mains power before beginning any electrical work and test that it is isolated - it is NOT enough just to turn off the light switch. Electrical products must be installed in accordance with IET regulations (BS 7671). If you are in any doubt, always consult a qualified electrician or an experienced person registered with an electrical Competent Person Scheme. Further information is available online or from your Local Authority. If the lighting circuit is not protected by a Residual Current Device (RCD) then the installation should be carried out and tested by a qualified electrician. If necessary, use a suitable stepladder, but first read the useful advice given by the Health and Safety Executive. Visit [www.hse.gov.uk](http://www.hse.gov.uk) and search for 'using stepladders'.


## Your toggle light switch

Your toggle light switch is suitable for indoor use only. Depending on the model, your toggle light switch has either one, two or three channels and each channel can be used in either a 1-way or a 2-way installation.

In a 1-way installation, you simply connect the Live mains feed to the L terminal and the wire from the bulb to the L1 (or L2) terminal. *Note: The earth connections are not shown in these diagrams but they are essential.*


In a 2-way installation, such as a landing light that can be switched from downstairs as well as upstairs, the wiring will be achieved in either of two ways:

You need to connect your new switch to the circuit in exactly the same way as the one that it is replacing. This product must be installed in accordance with local building regulations.

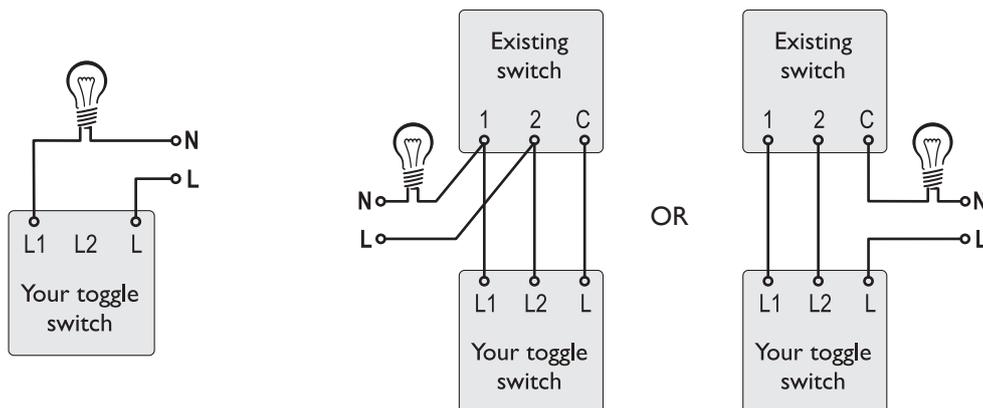

**IMPORTANT:** If you are in any doubt, STOP and seek professional help. Do not proceed unless you are sure.

Remove the front cover from your switch. Insert a small flat blade screwdriver into one of the base slots and carefully prise off the front cover.

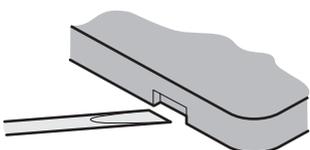


continued overleaf

## Connecting your toggle light switch


**IMPORTANT:** If you are in any doubt, STOP and seek professional help. Do not proceed unless you are sure.

1. Ensure that the mains supply to the circuit is isolated. Double check that both channels are dead.
2. Remove the two wall screws securing the existing switch.
3. Take a photo of the connections to its terminals. If necessary, label each wire using tape and a pen.
4. Disconnect the wires from the existing switch and remove it from the installation.
5. Connect the wires to your switch in the same way that they were connected to the previous one. If there are two, or three, separate channels, be sure not to mix their connections.
6. Ensure that a valid earth connection is made to the dimmer. Ensure that the bare copper earth connections have green/yellow sleeves to isolate them from other connections. Check that screw terminals are properly tightened and no bare wires are visible.
7. Secure the switch in place and test it.

### Single Gang Toggle Switch 250VAC, 10AX

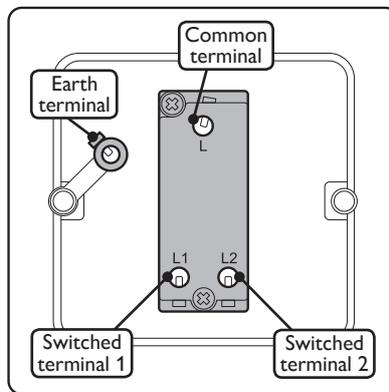

### Double Gang Toggle Switch 250VAC, 10AX per channel

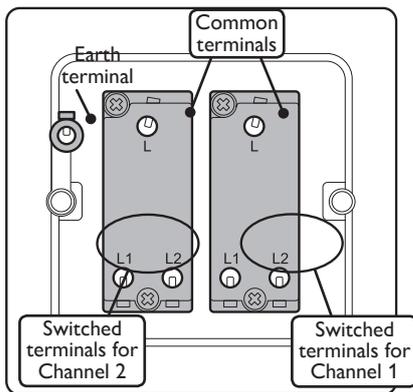

### Triple Gang Toggle Switch 250VAC, 10AX per channel

