



BLANK FASCIA


WARNING Never take risks with electrical safety. Always disconnect the mains power before beginning any electrical work and test that it is isolated - it is NOT enough just to turn off the light switch. Electrical products must be installed in accordance with IET regulations (BS 7671). If you are in any doubt, always consult a qualified electrician or an experienced person registered with an electrical Competent Person Scheme. Further information is available online or from your Local Authority. If the lighting circuit is not protected by a Residual Current Device (RCD) then the installation should be carried out and tested by a qualified electrician. If necessary, use a suitable stepladder, but first read the useful advice given by the Health and Safety Executive. Visit www.hse.gov.uk and search for 'using stepladders'.

Our blank fascias are available in single gang and double gang sizes to match standard UK wall outlets.

IMPORTANT: If you are in any doubt, STOP and seek professional help. Do not proceed unless you are sure.

To fit your blank fascia

- 1 If the existing outlet has cabling installed, ensure that the mains supply to the wall circuit is isolated.
- 2 If fitted, remove the current outlet cover. As necessary, make safe any existing wiring within the outlet back box.
- 3 If there will be live connections within the back box, you must make a valid protective earth connection to the grounding terminal on the panel of your new blank fascia.
- 4 Use the two supplied screws to fix the panel in place on the back box.
- 5 Ensure the two slots of the front cover are facing downwards and fit the front cover to the panel so that it clips into securely into place, concealing the fixing screws.

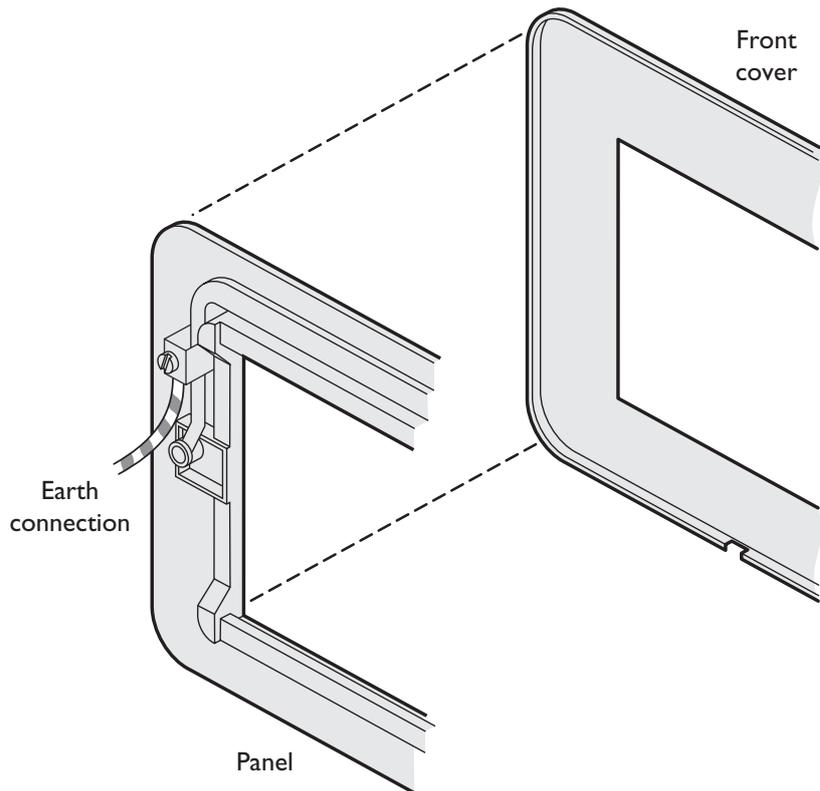

To open your blank fascia

- 1 With a small flat blade screwdriver, carefully lever off the front cover from the panel. There are two slots on the underside lip of the front cover.

