




1-WAY DIMMER SWITCH

WARNING Never take risks with electrical safety. Always disconnect the mains power before beginning any electrical work and test that it is isolated - it is NOT enough just to turn off the light switch. Electrical products must be installed in accordance with IET regulations (BS 7671). If you are in any doubt, always consult a qualified electrician or an experienced person registered with an electrical Competent Person Scheme. Further information is available online or from your Local Authority. If the lighting circuit is not protected by a Residual Current Device (RCD) then the installation should be carried out and tested by a qualified electrician. If necessary, use a suitable stepladder, but first read the useful advice given by the Health and Safety Executive. Visit www.hse.gov.uk and search for 'using stepladders'.

Your 1-way dimmer switch

Your dimmer switch supports LED lamps that are specified as being dimmable as well as conventional tungsten/incandescent lamps. Your dimmer supports total lamp loads between 5W and 150W.

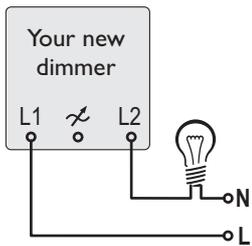


Your dimmer has two terminals labelled L1 and L2. You need to connect the live mains feed to one of the two terminals and the cable from the lamp(s) to the other terminal (it's not important which way round). The earth connection is not shown in this diagram but it is essential.

Note: This product must be installed in accordance with local building regulations.


To install your 1-way dimmer switch

IMPORTANT: If you are in any doubt, STOP and seek professional help. Do not proceed unless you are sure.

- 1 Ensure that the mains supply to the circuit is isolated. Double check that all channels are dead.
- 2 Remove the two wall screws that are securing the existing switch or dimmer and take a photo of its connections as a record.
- 3 Disconnect the wires from the existing switch or dimmer and remove it from the installation.
- 4 (If the cover is already fitted to your new dimmer switch), carefully insert a small flat blade screwdriver into one of the base slots to prise off the front cover.

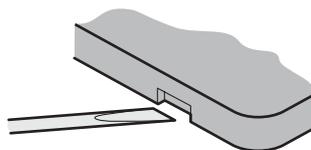

- 5 Connect the wires to your new dimmer switch:

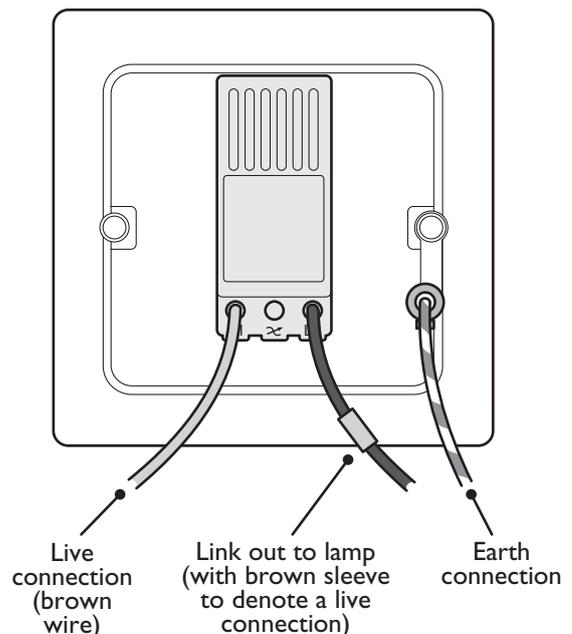

- 6 Ensure that a valid protective earth connection is made to the terminal on the side of the rear panel. Ensure that the bare copper earth connection has a green/yellow sleeve to fully isolate it from the other connections. Check that all screw terminals are properly tightened and that no bare wires are visible.
- 7 Secure the dimmer panel in place.
- 8 Place the front cover onto your dimmer panel and then fit the supplied knob.
- 9 Restore power to the circuit and test your new dimmer.